


ZINTRA 12MM ACOUSTIC PANEL

Acoustics » Acoustic Panels

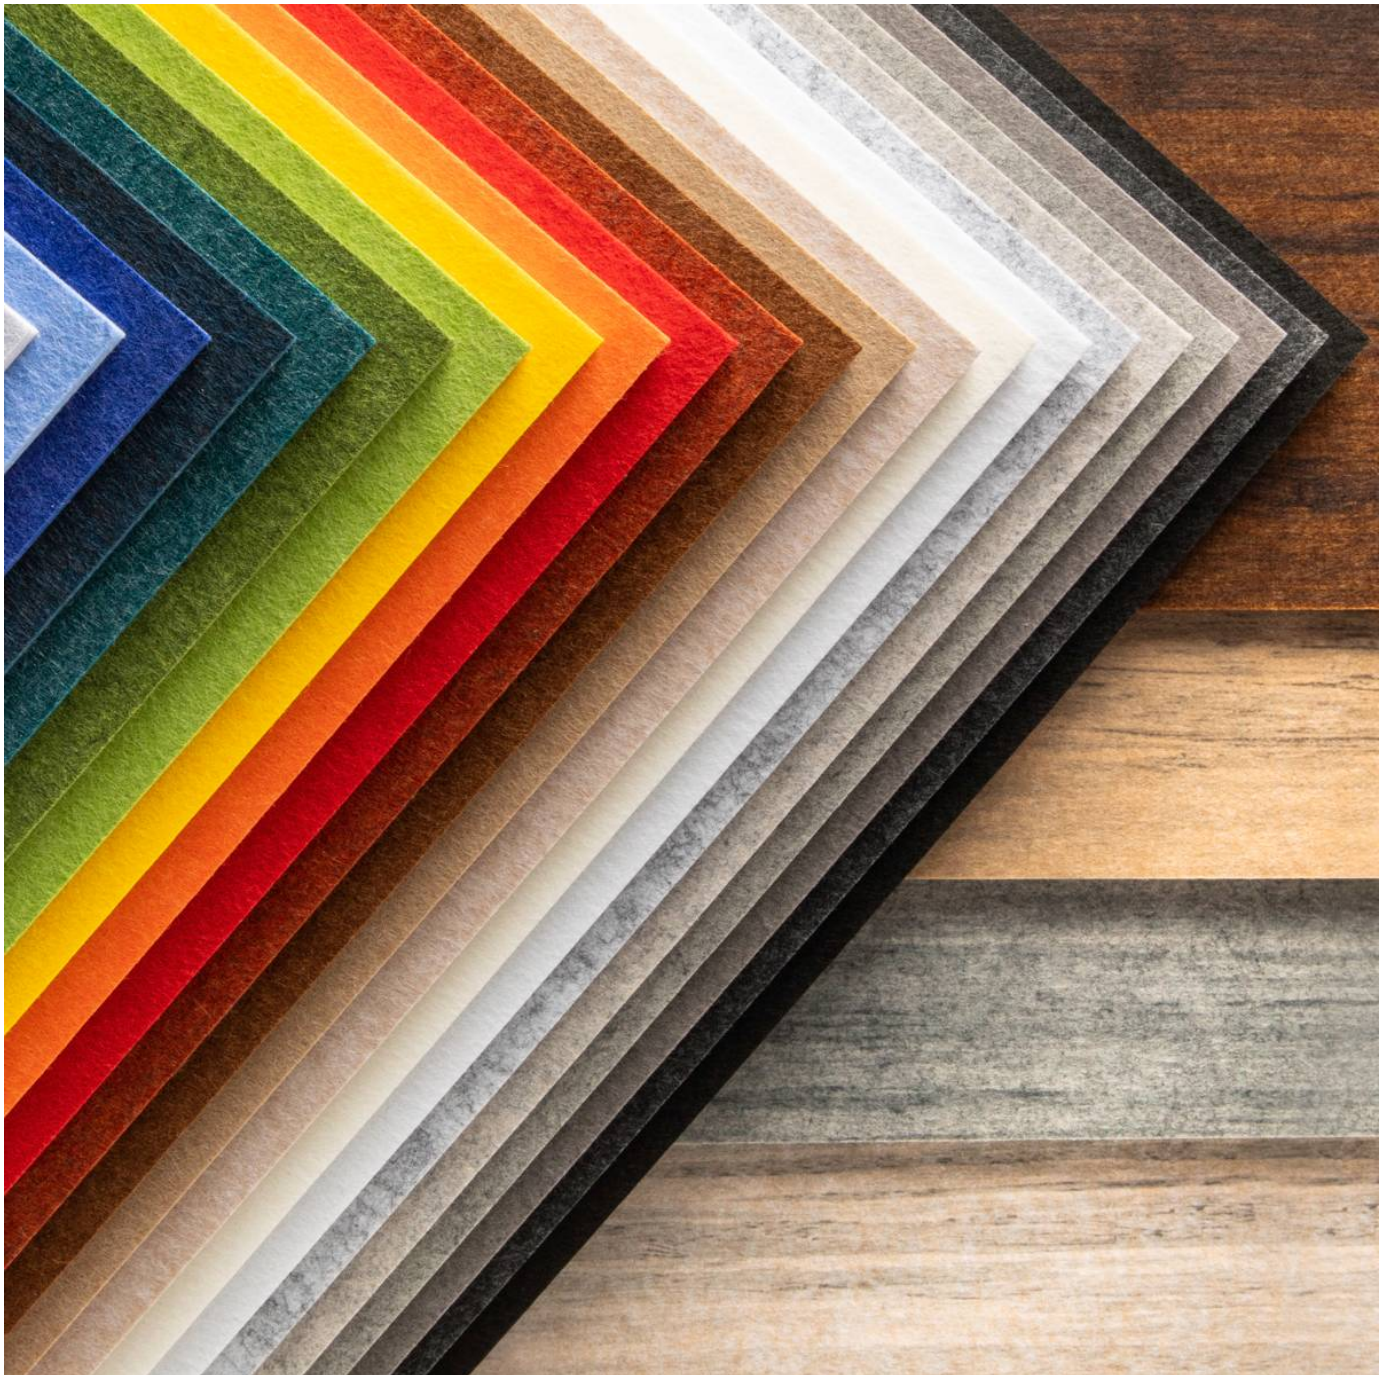

Brand: **Zintra**

ZINTRA 12MM ACOUSTIC PANEL


Acoustics » Acoustic Panels




BARK/COCOA



BRICK



CADET




CHAMBRAY/
PERIWINKLE



COBALT/NAVY



ECRU/TAUPE



FOSSIL



FROST/WHITE



GRASS/LIME




GREIGE




IVORY/MILKY




LINEN/CREAM




MALACHITE




MANDARIN/ORANGE



MIDNIGHT




OCHRE/BLUSH



OLIVE



PEBBLE



PEWTER/GREY



SKY/BLUE




SLATE/ASH



SMOKE/SILVER



SUNSHINE/YELLOW



TAR/BLACK



SLATE

ZINTRA 12MM ACOUSTIC PANEL

Acoustics » Acoustic Panels



Zintra Acoustic Panel is the perfect solution for your application where acoustic performance and aesthetics are required. Available in 24 colours.

- Absorbs Noise
- Bleach Cleanable
- Environmentally Friendly
- Extended Warranty
- Solution Dyed Yarns
- Easy Fabrication
- Easy Install

ZINTRA 12MM ACOUSTIC PANEL

Acoustics » Acoustic Panels

Description Baresque's Zintra Acoustic Panel is the perfect solution for your application where acoustic performance as well as aesthetics are required.

Zintra's wide range of colours and ease of use make it the ideal material for commercial, hospitality and institutional projects.

Zintra Acoustic Panel features include:

- Cost effective sound solution
- NRC = 0.45 for 12mm, 0.75 for 24mm
- 2800mm long sheets ideal for join-free floor to ceiling applications
- Broad range of neutral and bright colours
- Suitable for a multitude of applications - walls, ceilings, screens
- Easily fabricated and installed

Pinnable Find out more about the Benefits of Zintra and its NRC rating on the [DOWNLOAD](#) tab.

Dimensions 2800mm x 1225mm x 12mm

Composition Zintra Acoustic Panel - 100% Solution Dyed (Colour Through) Polyester. 2.3 kg/m²

Finishes Matt

Environmental Info Easily recycled through standard recycling channels

Fire Rating Tested in accordance with AS ISO 9705 2003 for the purpose of determining the Group Number classification required by the Building Code of Australia for the control of fire spread on interior wall and ceiling linings.

Classification - Group 1
Specific Extinction - Less than 250m²/kg

Warranty 5-year warranty. Visit [baresque.com.au/about/faq/](https://www.baresque.com.au/about/faq/) for complete details.

Lead Time

- Held in stock in Australia. From receipt of full payment:
- Sydney, Melbourne, Brisbane: 3 working days
- Adelaide: 4 working days
- Perth: 5-working days

ZINTRA 12MM ACOUSTIC PANEL

Acoustics » Acoustic Panels

Suggested Installation

Be sure to support the panel during installation to avoid bowing or creasing.

Adhere to substrate using contact adhesive, Liquid Nails or Z clips.

Panel can also be mechanically fixed using details similar to glass fittings.

Download the Handling and Installation guide for full instructions.

Fabrication Techniques

Stanley knife and straight edge

How to Specify

Colour

Care Instructions

Remove spills immediately using damp, clean cloth.

Dab Zintra with a clean, soft white cloth dampened with a mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.

Avoid using wax polishes, solvents or concentrated abrasives. For more difficult stains, dampen a soft white cloth with a solution of household bleach (10% bleach / 90% water). Dab gently.

Repeat using only a clean, water dampened cloth to remove bleach concentration then pat dry with a lint free cloth.

Always test in an inconspicuous area first. If care instructions don't deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.

Customisable

The Zintra Acoustic Solutions range is customisable to your project. Please get in touch with your local contact for details.

Additional Comments

NRC - 0.45 - 0.9 Indoor only. Not suitable as a free standing product.
