



Flinders

QuietBack™ Carpet Tiles

acoufelt
making quiet

Product Detail

Product	Flinders Carpet Tile
Surface	Floor
Composition	QuietBack™
Material	100% solution dyed nylon
Style	Multi-level textured loop pile
Recycled Content	QuietBack™ = >80% recycled PET content
Tile Dimensions	500 x 500mm
Thickness	8mm
Tiles per box	20

Guarantees

Wear Warranty	20 years*
Castor Chair Proof	20 years*
Anti-Static	Lifetime*
Colorfast	20 years*
Classification	Commercial Extra Heavy Duty

*conditions apply

Technical Data

Dimensional Stability	ISO 17984, -0.05%
Electrostatic Propensity	AATCC 134 ≤ 1000V
Light Fastness	ISO 105-B02, 6-7
Thermal Resistance	0.2m ² K/W
Fire Test Method	AS/ISO 9239.1-2003
Critical Heat Flux	Mean result 4.9kW/m ²
Smoke Deviation Rate	Mean result 187%.min
Fire Test Method	ASTM E648 Class 1
Critical Heat Flux	Average, 0.54kWm ²
Smoke Density Test Method	ASTM E662 (Flaming)
Smoke Density Test Method	450 or less
Fire Test Method	EN 13501-1:2019
Critical Heat Flux	Cfl
Smoke Deviation Rate	s1

Environmental Attributes


- One square meter diverts 36 x PET (600ml) drinking bottles from landfill
- LCB Red List Free
- Phenol & Formaldehyde Free
- Total VOC's 0.5 mg/m³ or less
- Recognised under LEED



Declare.


Acoustic Performance

Sound Absorption ASTM C423, NRC 0.35

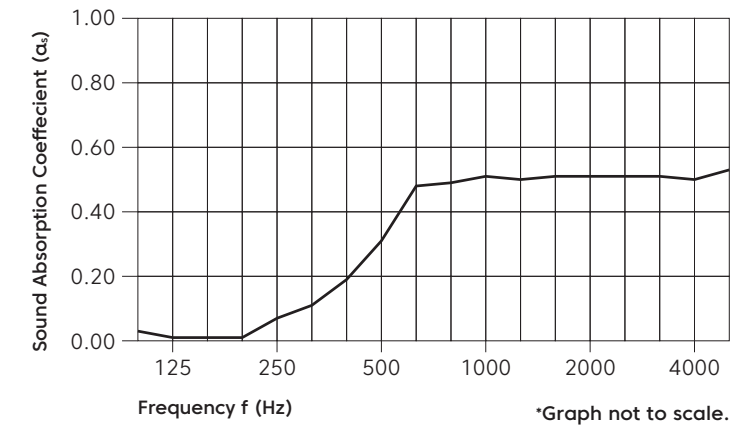


Frequency (Hz)	125	250	500	1000	2000	4000	NRC
α _s	0.01	0.07	0.31	0.51	0.51	0.50	0.35


Installation Method

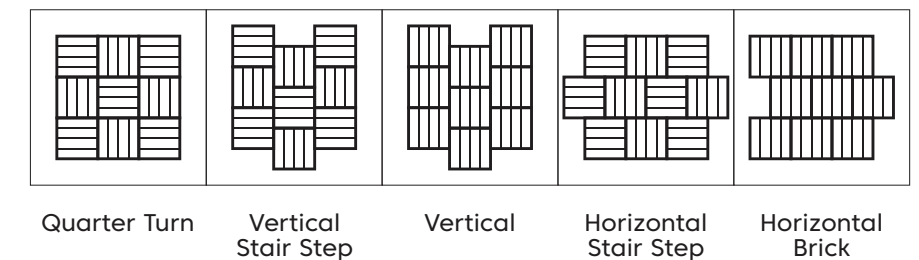


Colorways

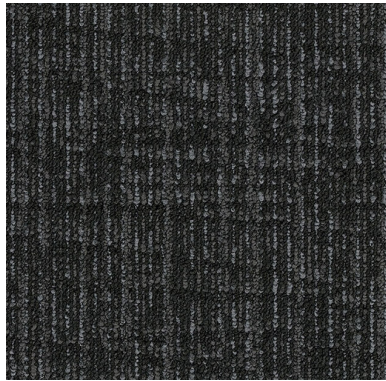

Ikara Place

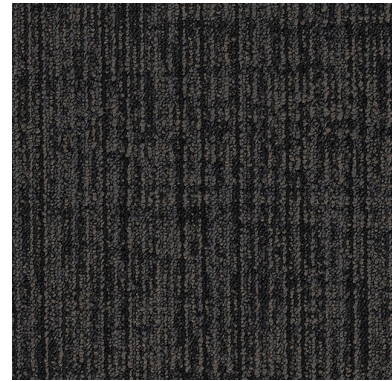


Western Grey

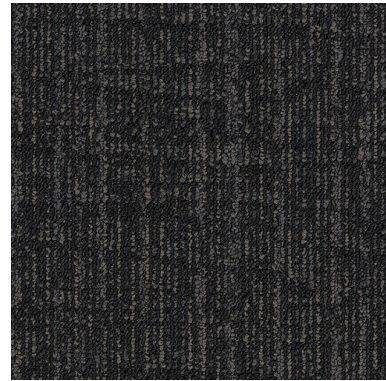


Sliding Rock




Monsoonal Wind

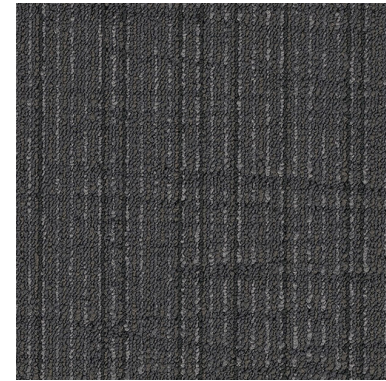

Shale Outcrop

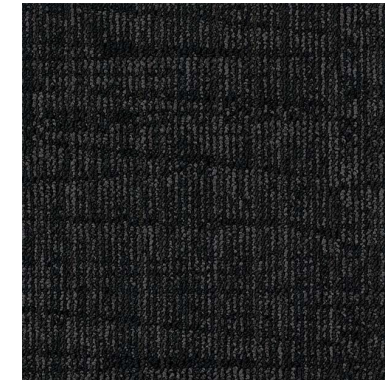

Pichi

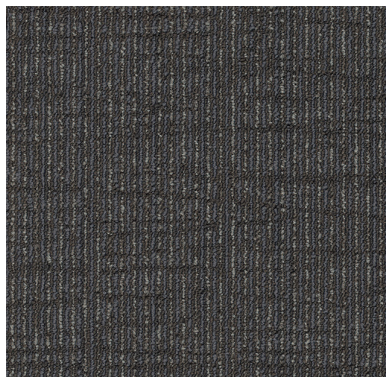

Embankment



Outback



Marree