



WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET

ISSUE DATE: 16.4.20

DESIGN NAME: Cocoon 1400 / 1750

DESIGNER: Woven Image

ORIGIN: Australia


COLOURS: EchoPanel® 542 with charcoal pivot joiners  
 EchoPanel® 633 with charcoal pivot joiners  
 EchoPanel® 101 with charcoal pivot joiners  
 EchoPanel® 454 with cream pivot joiners  
 EchoPanel® 487 with cream pivot joiners  
 EchoPanel® 384 with cream pivot joiners

PANEL DIMENSIONS: 1400mm (+/- 2mm) x 285mm (+/- 2mm)  
 OR  
 1750mm (+/- 2mm) x 285mm (+/- 2mm)


PANEL THICKNESS: 24mm +/- 7% (EchoPanel®)

WEIGHT: 1400 approx. 8 kg per kit  
 1750 approx. 9.5kg per kit

CONTENTS: 6 x Panels (100% PET (60% recycled))  
 10 x Pivot Joiners (ABS Plastic)




10 x Pivot Joiners

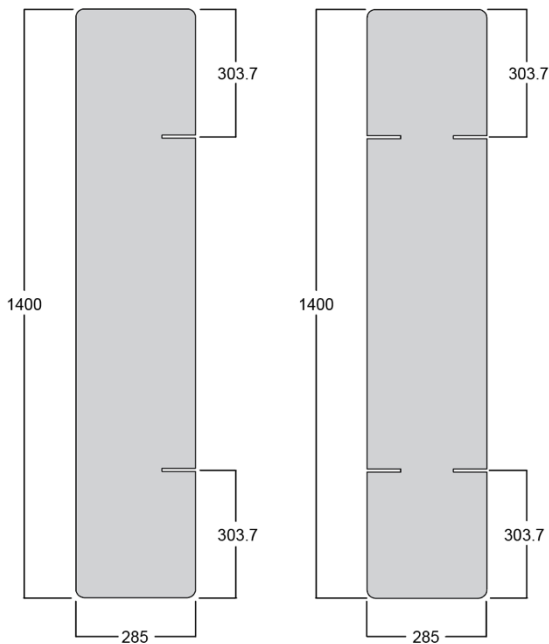

2 x End Pieces


4 x Middle Pieces

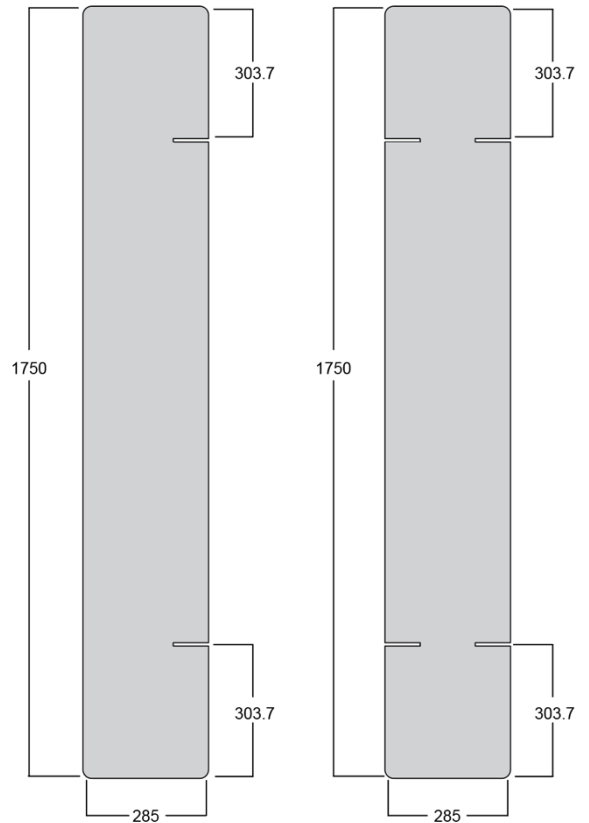

2 x End Pieces

4 x Middle Pieces

**PERFORMANCE AS PER ECHOPANEL® 24MM:**

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	ISO 9705: Group 1 ASTM E84 Unadhered: B or Class 2 BS EN 13501.1: Classification B-s1, d0
FABRIC CARE:	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
SOUND ABSORPTION:	AS ISO 354 – 2006 NRC Value: 0.65 (with no air gap) NRC Value: 0.75 (with 20mm air gap) NRC Value: 0.85 (with 50mm air gap)
VOC EMISSIONS:	ASTM D5116 Rate: < 0.02 mg/m <sup>2</sup> /hr (7 days) 
ENVIRONMENTAL:	EchoPanel® achieves GreenTag Certification GreenRate: Level A