Extra Large Booth

Your quiet space for undisturbed phone calls and deep work.

Tech Specs
Bureau Booth - Extra Large

Capacity	1-6 Person including wheelchair accessible option
Internal Dimensions (mm)	2040w x 2150d x 2140h
External Dimensions (mm)	2200w x 2186d x 2300h
Glass Panels	Double laminated (6mm + 1mm + 4mm)
Door	855mm wide glass door with handle
Furniture Options	x2 upholstered bench seats with back & central laminated or veneer table; or x1 wall-mounted desk & task chair
GPO | USB | Data | Wireless Charging	Wall-mounted: x2 GPO, x1 USB C and x1 USB. Optional table top insert: x2 GPO, x2 USB, wireless charger
Lighting	1 x 16W LED – 3000k, CRI95+
Ventilation & Airflow	Variable speed fan with integrated acoustic cover
Lighting & Ventilation Operation	Motion sensor with variable speed fan control
Power Usage	30.4 watts
Weight	680kg
Acoustic Treatment	27mm bevel edge acoustic panels (dark grey). Acoustically treated exhaust port and acoustic cover to fan ports

Extra Large Booth / Furniture Options

TABLE

Desktop
Size: (L 1000×W 550×H 760) mm. **Material:** Birch Plywood, Melamine faced fireproof board surface treatment: Edge Sealed with Wood Wax Oil. **Material Support:** Cold Rolled Steel Surface Treatment: Electrostatic Powder Coating.

X2 SOFA

Composition: 100% Polyster; Colour: Back rest Dark Grey 'Col. OL-40' and Seat Light Grey Col. OL -21'. **Manufacturer:** OTE Fabrics; Weight: 480g/m; Wight:145cm; Durability: 40,000 Martindale; Lightfastness: 4-5; Pilling Resistance: 4-5 (ISO 12945).

Colors

EXTERIOR

STANDARD

Cloud White	Domino Black	Orange Peel	Dove Grey	Sicilian Olive	Mist Green	Custom Colours

INTERIOR

Acpustic PET Panel Dark Grey GP-04

CARPET

Standard Dark Grey Felt FP1-1

SOFA

OTE Fabrics (Standard) 100% Polyester OL-40

OTE Fabrics (Standard) 100% Polyester OL-21

Features

QUICK ASSMBLY

PLUG-&-PLAY TECHNOLOGY

DOUBLE LAMINATED GLASS (6+1+4)MM

POWDER COATED GLASS EDGE

INTEGRATED VENTILATION

OPTIONAL MOVING KIT

ALUMINIUM LEVER DOOR HANDLE

ALUMINIUM FRAMED DOOR

INTERNAL SWITCHES & SENSORS
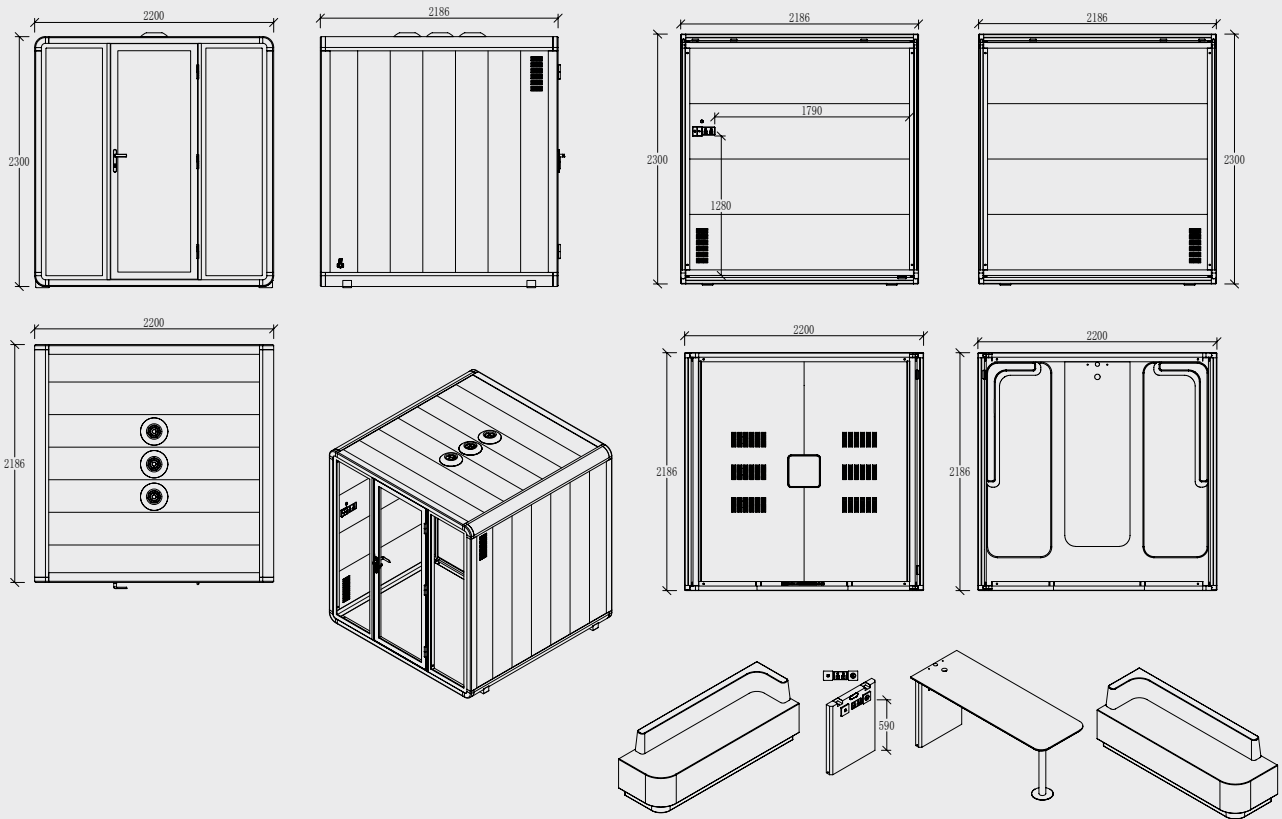
HYDRAULIC DOOR CLOSERS

ABILITY TO PORT FIRE SERVICES

ELECTROSTATICALLY COATED HINGES

Extra Large Booth / Dimensions

Power

INTERNAL Integrated within wall below desk: x2 GPO, x1 USB C and x1 USB; Optional table top insert: x2 GPO, x2 USB, wireless charger; Manual switches for adjustable lighting and fan speed

EXTERNAL Allow 3m cable from back left corner

SOFT WIRING Standard AU power double GPO; Voltage:110-220V/50Hz and 12V-USB power supply system

Ventilation

VENTILATION FAN x1 Variable speed fan with acoustic cover; Diameter: 200mm, Silent and Built-in Ventilation System

Acoustics

SOUND REDUCTION > 32 dB (Speech level reduction according to ISO 23351-1 testing method)

Download

| 3D MODELS AND RENDERS | INSTRUCTION MANUAL | BROCHURE |

Certifications

Accessible options; PET Fire Tested; ISO: 9001-2015 Quality Certified; ISO: 14001-2015 Environmental Certified; FSC Certified; AS/NZS 2208: 1996 Certified Glass; UL and CE Certified; Class B Certified Panels; Fire Growth Rate Index 153.2; ASTM E84-19A Tested; Flame Spread Index 15; Smoke Development Index 185