Ecoustic® Torque

An acoustic modular wall tile that provides excellent broadband sound absorption




Ecoustic® Torque Wall Tile

Front View

570mm

Side View



PRODUCT Ecoustic® Torque Wall Tile

DESCRIPTION Ecoustic® Torque is an acoustic modular tile

that provides excellent broadband sound

absorption in wall applications


OPTIONS Ecoustic® Infill increases acoustic performance

by 30%

DIMENSIONS 570mm (w) x 570mm (h) x 42mm (d)

ACOUSTIC α W 0.5 / NRC 0.6

αw 0.75 / NRC 0.8 (Ecoustic® Infill)



FIRE TEST

AS/NZS 1530.3 Ignitability 9

Spread of Flame 0 Heat Evolved 3 Smoke Developed 6

GB8624-2012 Grade B1

APPLICATION wall + ceiling (must be glued)

ORIGIN Made in Australia

Please contact your representative for CAD drawings

BENEFITS

Lightweight, Easy to Handle + Install: Position the 4-way clips using the template provided, then simply press the tile into place. The design can be easily extended at a later stage.

Designed for the Environment

- Based on low energy manufacturing
- 100% polyester (up to 23% PC + PI recycled content)
- Designed for disassembly + recyclable
- Low-VOC, EPD + Greentag Level A Certified

Warranty: A 12 month warranty is provided against manufacturing defects. Internal installation only, outdoor use will void any warranty.


Building Rating Systems: Torque will contribute the following points for Green Star, LEED + WELL building standards.

| Criteria | Green Star | LEED | WELL |
|---|---------------|------|------|
| Recycled Content | √ | √ | NA |
| Low VOC | √ | √ | √ |
| Recycling Program | √ | √ | NA |
| EPD | √ | √ | NA |
| Third Party Greentag Level A Certification | V | V | V |
| Toxic Material Reduction | NA | NA | √ |
| Sound Reducing Surfaces | NA | NA | √ |

| HOW TO SPECIFY | | |
|------------------|------------------------------------|--|
| DESIGN | Ecoustic® Torque Wall Tile | |
| COLOUR | Select from Ecoustic® Felt colours | |
| ECOUSTIC® INFILL | Optional extra - order separately | |



Ecoustic® Torque Components

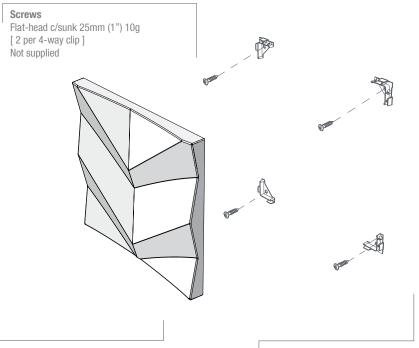

Ecoustic® Torque Tile

100% polyester (up to 23% recycled content)

8 tiles per box in a single colour



4 way clip

Clear ABS

16+1 spare 4-way clips are supplied with each box Single clip template is included in each box



Complete

Use a complete clip for each junction of 4 tiles



Half


Break a clip in half for each straight edge 2 tile joins



Quarter

Break clip into quarters for each single tile corner

Example 2280 x 2280mm Clip Layout



Product may vary in colour due to the nature of the media Please refer to website for current colour range

Variation in fibre mix and colour is an inherent feature of this product and variation from batch to batch may occur

