1

24mm blade   ABS clip

Standard ceiling grid

470mm between clips
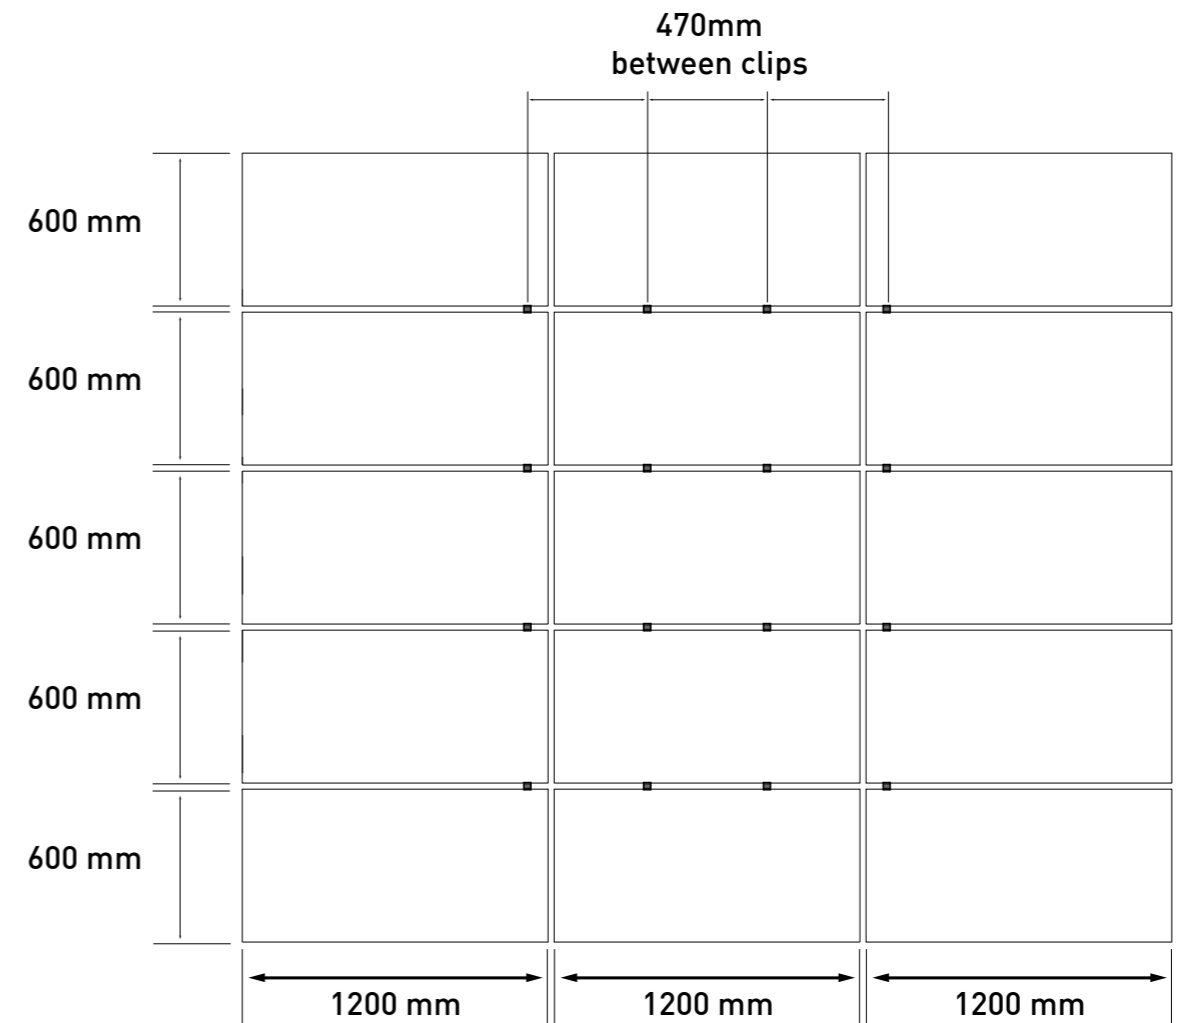
600 mm
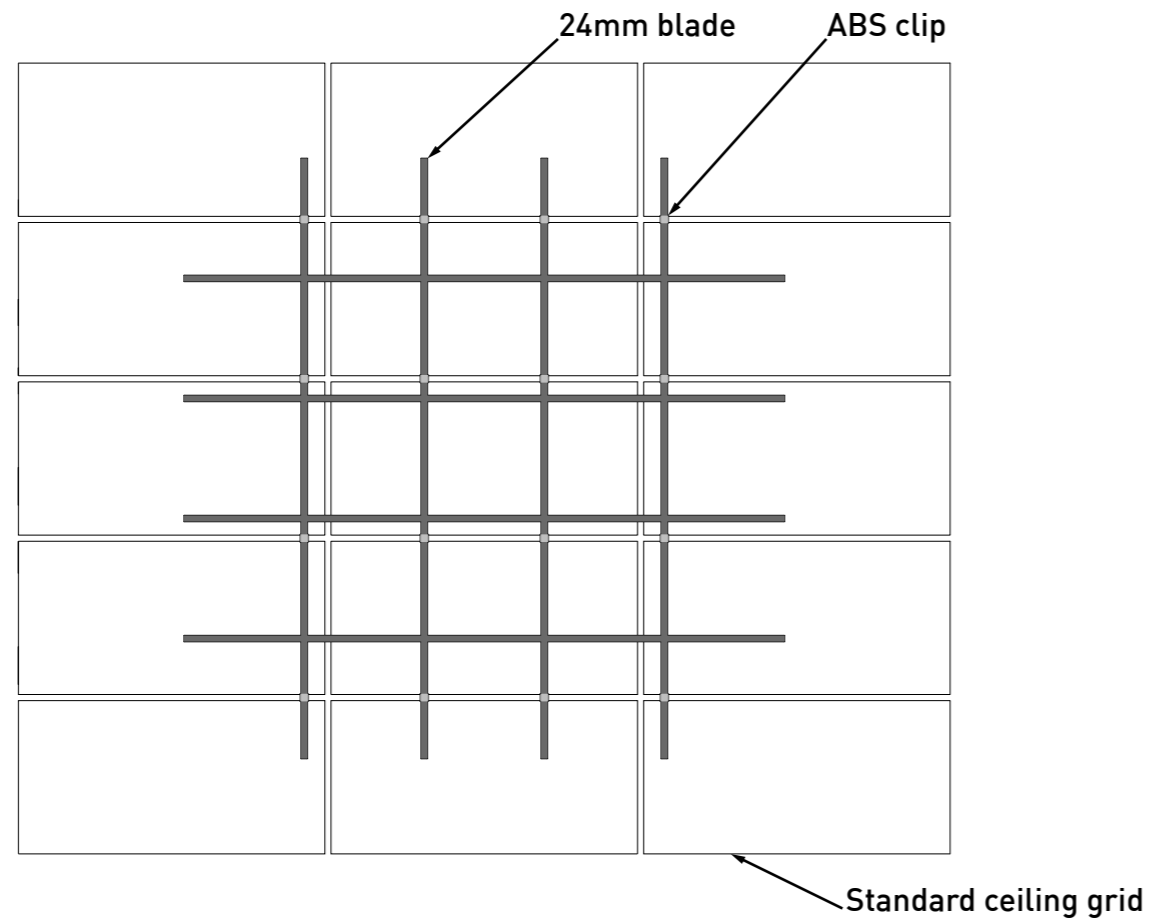600 mm
600 mm
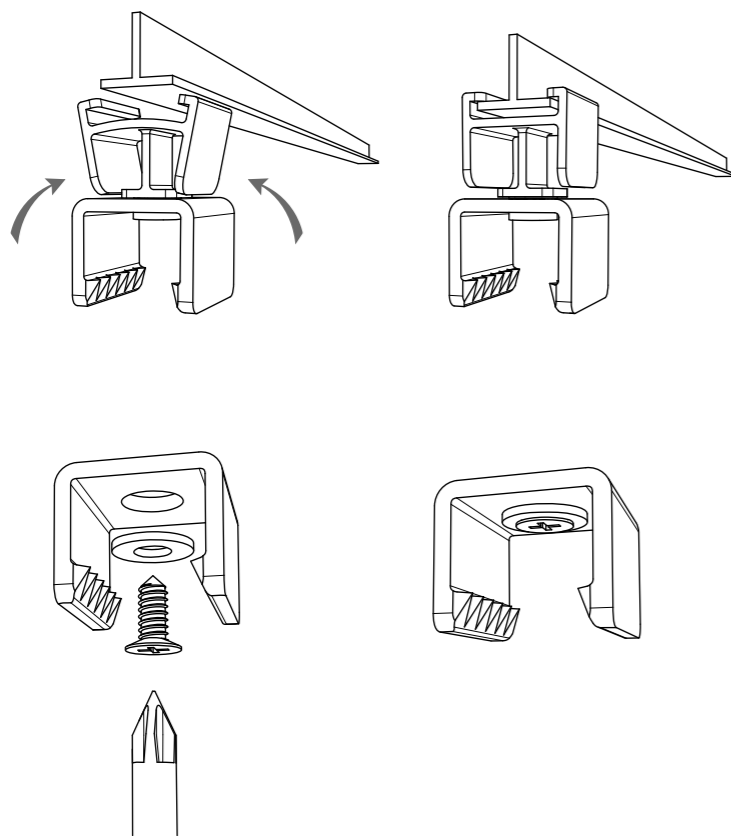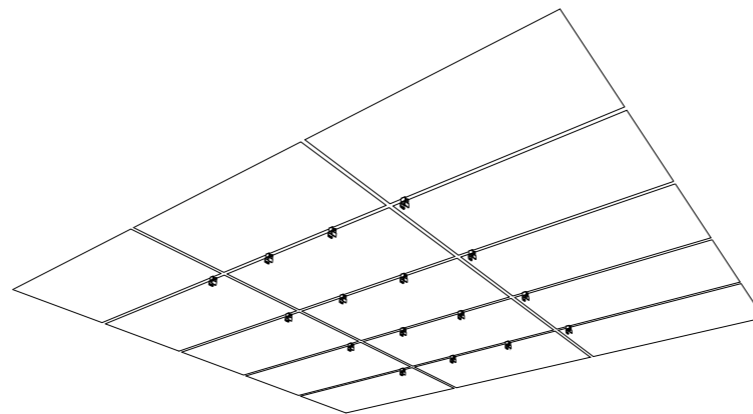600 mm
600 mm

1200 mm   1200 mm   1200 mm

2

Choose either the track clip for ceiling grids, or direct screw to ceiling.

If fixing with a screw, it is critical to also use a washer.
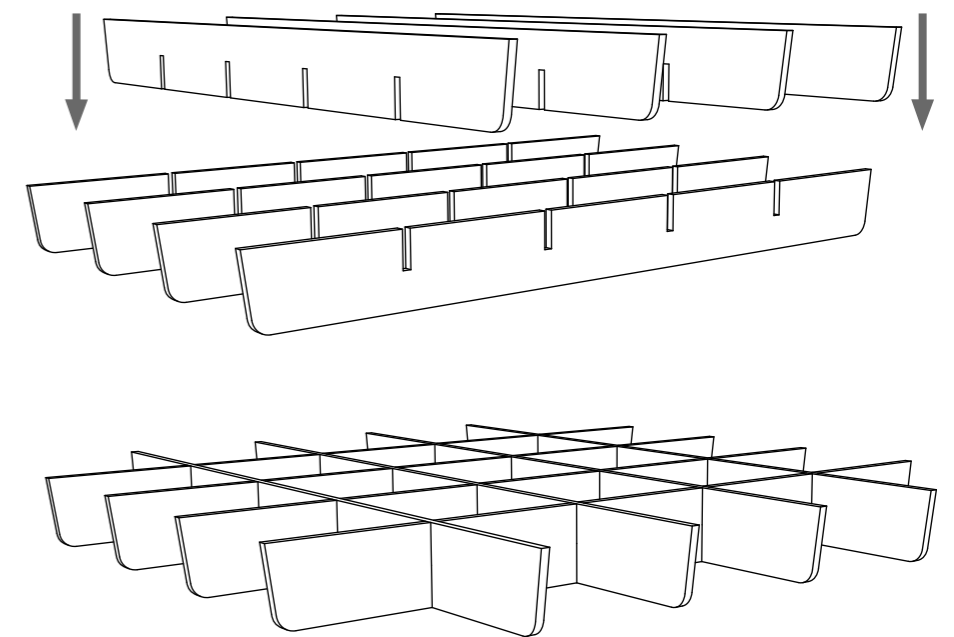
3

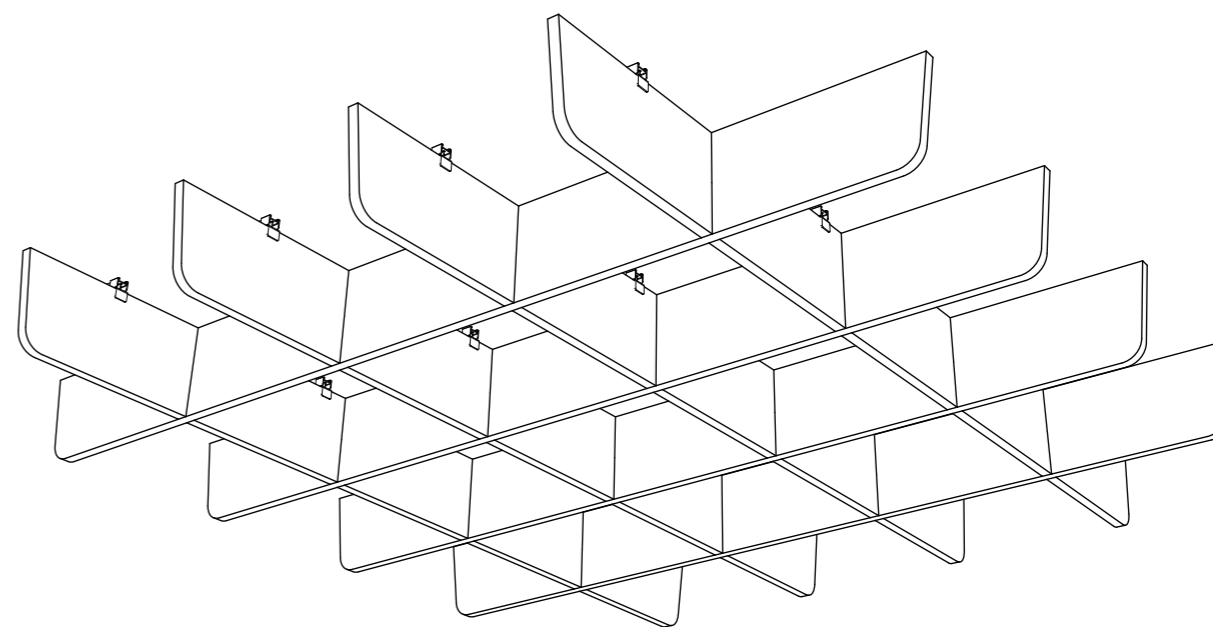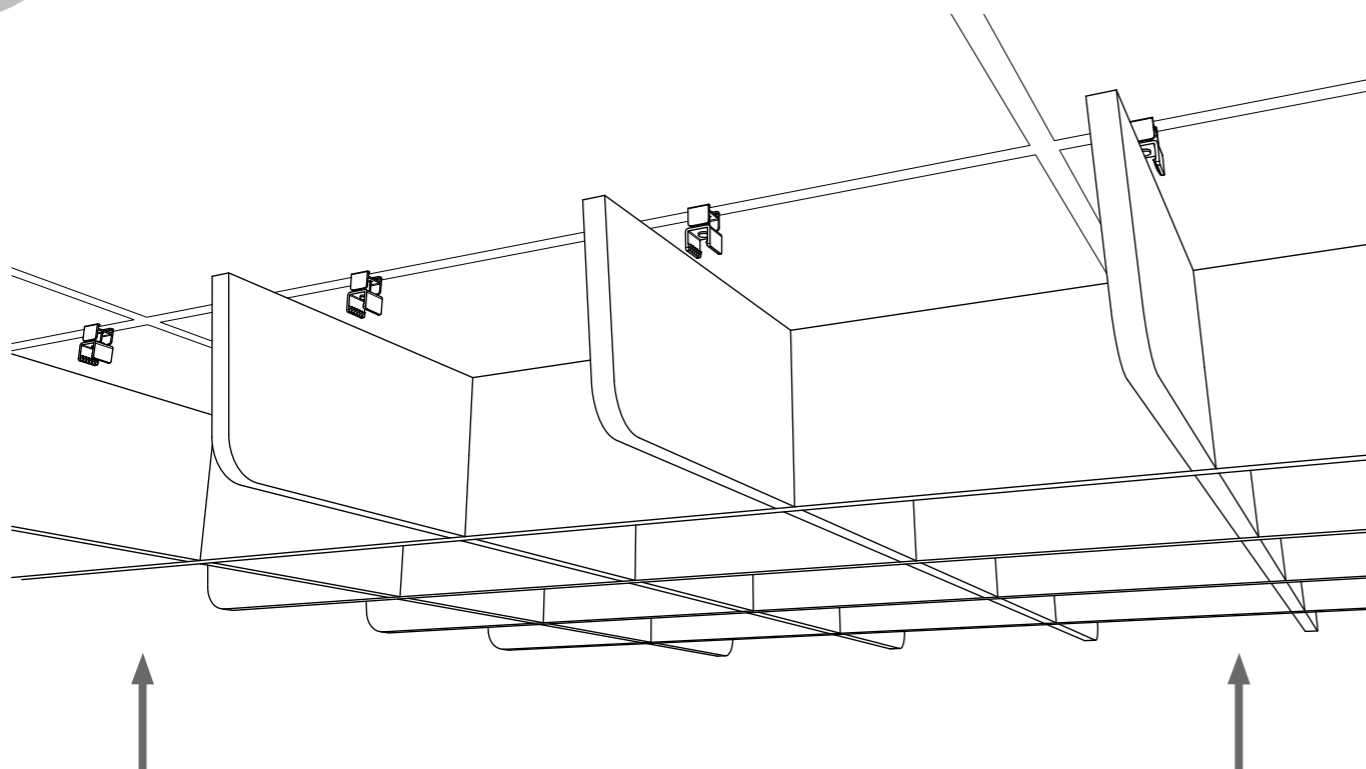When all the clips are fixed you will have a grid of clips ready to install the blades.

4

Slot top and bottom blades together forming a square grid.

WI
WOVEN IMAGE®

© WOVEN IMAGE®

5

Push EchoPanel® Element into the clips,
making sure all 16 clips are holding the structure.

EchoPanel® Element
Installation Guide

The clips supplied are appropriate for the installation of one EchoPanel® Element kit.

Cleaning & Care for EchoPanel® Element

Regular Care
- Protect from direct sunlight.
- Vacuum regularly using low suction and smooth attachment.

Cleaning
- Professional cleaning recommended.
- Do not shampoo clean.

Spot Cleaning
- Treat spills and stains as soon as possible.
- Avoid concentrated rubbing. Use minimal pressure only.
- Gently scrape soil or mop liquid from the surface of the tile.
- Apply proprietary cleaning agents strictly according to instructions.
- Do not saturate the tile or interior with water or other cleaning liquids.
- May be spot cleaned with dry cleaning solvent.

For more information visit wovenimage.com

Specification

- Non-woven PET acoustic ceiling blades
- 2350 x 215 x 24 mm per blade
- 8 blades per box, to form one Grid
  (sold by the box only)

Contents of box

- 8 blades
- 16 clips
- Installation Guide

Please read these instructions before application.

This guide is presented in good faith to help in the installation of Ceiling Grid.
Woven Image accepts no responsibility for installation actions taken or not taken. This guide contains recommendations and is not intended as an all-encompassing guide, your knowledge as an experienced tradesperson needs to be applied.

A professional qualified installer is recommended for optimum results.

Pre-Installation Requirements

- Please check that all ceiling blades are the correct colour, shape and same batch number (if requested).
- No claims will be accepted after EchoPanel® Element has been installed.
- The clips should be tested for ceiling suitability and type of fixing required.
- All surfaces must be smooth, clean, dry, dust and mould free.
- Please refer to Woven Image Pty Ltd Terms and Conditions of Trade.